
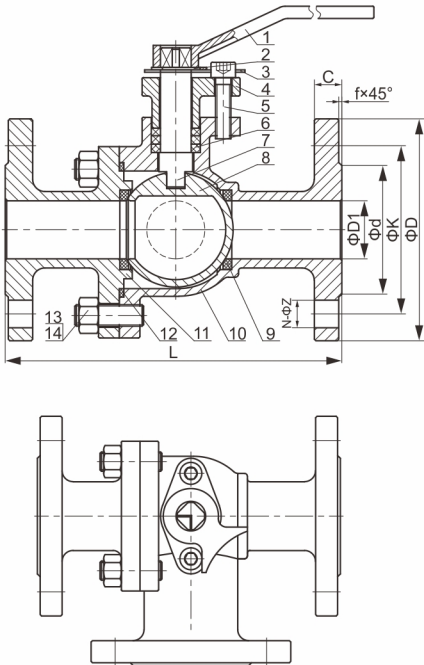


GB L TYPE BALL VALVE
 DN15-300 Q44F-16

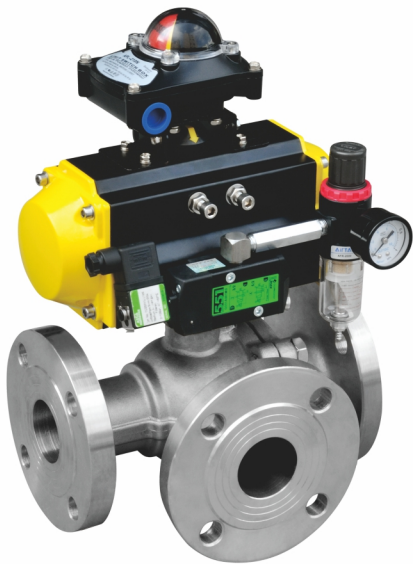

技术要求 Applicable Standards

1. 设计标准 Design Rating:GB/T12237;
2. 结构长度 Face to Face: GB/T12221;
3. 法兰标准 Flanged Ends: JB/T79, GB/T9113, HG/T20592;
4. 检查和试验 Inspection & Testing: GB/T26480, JB/T9092.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	手柄 Handle	WCB	
2	挡圈 Retaining ring	65Mn	304
3	限位块 Orientation patch	Q235	304
4	填料压盖 Gland	WCB	CF8
5	螺钉 Screw	25#	304
6	填料 Packing	PTFE	
7	阀杆 Stem	45#	304/316

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	球体 Ball	304	304/316
9	阀体 Body	PTFE	
10	阀座 Seat	WCB	CF8/CF8M
11	阀盖 Bonnet	WCB	CF8/CF8M
12	密封垫 Gasket	PTFE	
13	螺母 Nut	35#	304
14	螺柱 Stud	45#	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

DN	D1	d	K	D	f	C	N-ΦZ	L
15	13	45	65	95	2	14	4-14	150
20	19	55	75	105	2	14	4-14	160
25	24	65	85	115	2	14	4-14	180
32	28	78	100	135	2	16	4-18	200
40	35	85	110	145	2	16	4-18	220
50	45	100	125	160	3	16	4-18	240
65	58	120	145	180	3	18	4-18	260
80	75	135	160	195	3	20	8-18	280
100	95	155	180	215	3	20	8-18	320
125	119	185	210	245	3	22	8-18	380
150	145	210	240	280	3	24	8-23	440
200	190	265	295	335	3	26	12-23	550
250	240	320	355	405	3	30	12-25	670
300	290	375	410	460	3	30	12-25	720